


Auxiliary hand levers for solenoid valves

direct operated on-off and proportional, ISO 4401 size 06

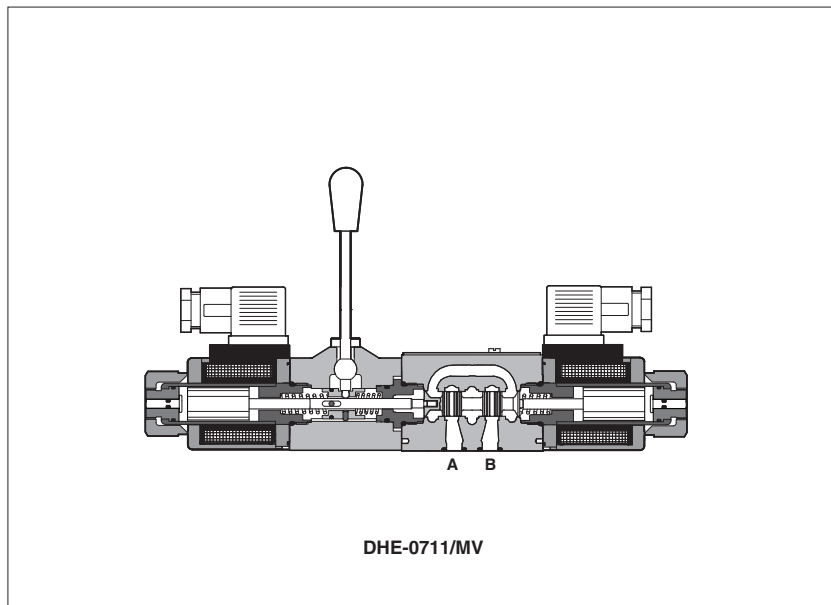

Auxiliary hand levers for direct operated on-off and proportional valves size 06, type DHI, DHE, DHER, DHZO and QVHZO.

This option allows to operate the valves in absence of electrical power supply, i.e. during commissioning, maintenance or in case of emergency.

It is available with two different configurations depending to the installation requirements:

MV = lever positioned vertically (perpendicular to the valve axis)

MO = lever positioned horizontally (parallel to the valve axis)

When the valve is electrically operated the hand lever remains stopped in its rest position

The hand lever execution does not affect the performances of the original valves.

1 MODEL CODE FOR ON-OFF DIRECTIONAL VALVES (for the details, see tab. E010)

DHI	-	0	63	1/2	/	MV	-	X	24 DC	**	/*
Directional control valves size 06 DHI-0 = for AC and DC supply, with cURus certified solenoids DHE-0 = for AC and DC supply, high performances DHER = as DHE but with cURus certified solenoids DHA (1)									Synthetic fluids WG = water glycol PE = phosphate ester Series number		
Valve configuration: 61 - 63 - 71									External supply voltage 00 = valve without coils		
Available spools: 0 - 0/2 - 1 - 1P - 1/2 - 1/2P - 3 - 3P - 4 - 7 Options, hand lever configuration: MO = horizontal hand lever (not for DHA) MV = vertical hand lever AMO = horizontal hand lever installed at the side of port B (not for DHA) AMV = vertical hand lever installed at the side of port B									X = without connector		

(1) For the DHA model code and available options, see tab. E120 (Atex) and E125 (UL)

2 MODEL CODE FOR PROPORTIONAL DIRECTIONAL VALVES AND FLOW CONTROL VALVES (for the details, see tab. F160 and F410)

DHZO	-	A	-	0	7	1 - S	/	5	/	MV	/	**	/	*
DHZO = directional control valve QVHZO = flow control valves DHZA = ex-proof directional control valve(1)									Synthetic fluids WG = water-glycol PE = phosphate ester Series number					
A = without position transducer (2)									Options, hand lever configuration: MO = horizontal hand lever (not for DHZA) MV = vertical hand lever only for DHZ*: BMO = horizontal hand lever installed at the side of port A BMV = vertical hand lever installed at the side of port A					
Valve size 0 = ISO 4401 size 06 (for DHZO) 06 = ISO 4401 size 06 (for QVHZO)									Spool size (for DHZO): S3 - S5 - D3 - D5 - L3 - L5 Max regulated flow (for QVHZO): 3-12-18-36-45 l/min					
Valve configuration (only DHZO)														


Note:

(1) For the DHZA model code and available options, see tab. E120 (Atex) and E125 (UL)


(2) Valves with position transducer (-T) and/or integrated electronics (only double solenoid valves -TE/-AE) available on request

3 LEVER CHARACTERISTICS



Total angle stroke	[°deg]	± 28°	Lever actuating force	[N]	1 ÷ 8
Working angle stroke	[°deg]	± 15°	Lever device weight	[g]	880

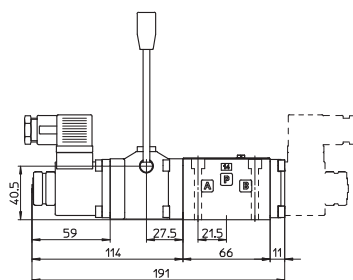


DHI-06*/MV
DHI-07*/MV (dotted line)




Mass: 2,4 kg (single solenoid)
Mass: 2,7 kg (double solenoid)

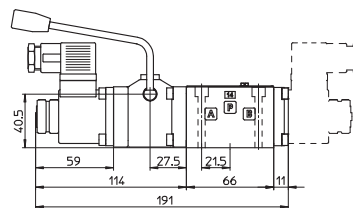



DHI-06*/MO
DHI-07*/MO (dotted line)

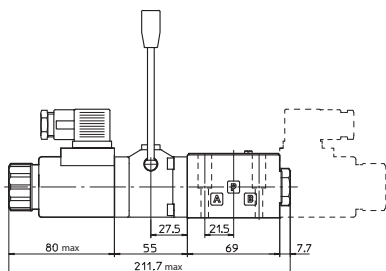


DHE(R)-06*/MV
DHE(R)-07*/MV (dotted line)




Mass: 2,7 kg (single solenoid)
Mass: 3,0 kg (double solenoid)

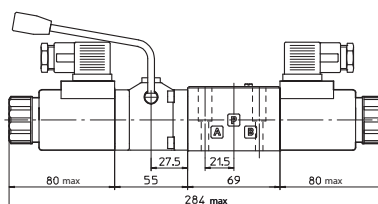



DHE(R)-06*/MO
DHE(R)-07*/MO (dotted line)

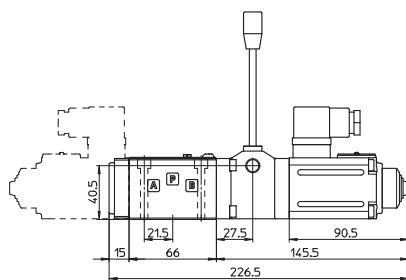


DHZO-A-05*/MV
DHZO-A-07*/MV (dotted line)




Mass: 2,8 kg (single solenoid)
Mass: 3,5 kg (double solenoid)

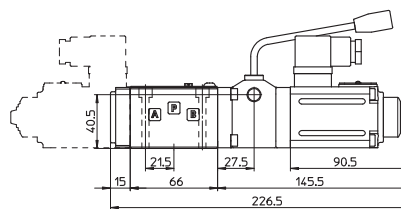



DHZO-A-05*/MO
DHZO-A-07*/MO (dotted line)




QVHZO-A-06*/MV




Mass: 3,2 kg





QVHZO-A-06*/MO



DHA/*-06*/MV
DHA/UL-*06*/MV (dotted line)



Mass: 3,4 kg



DHA/*-06*/MO
DHA/UL-*06*/MV (dotted line)